




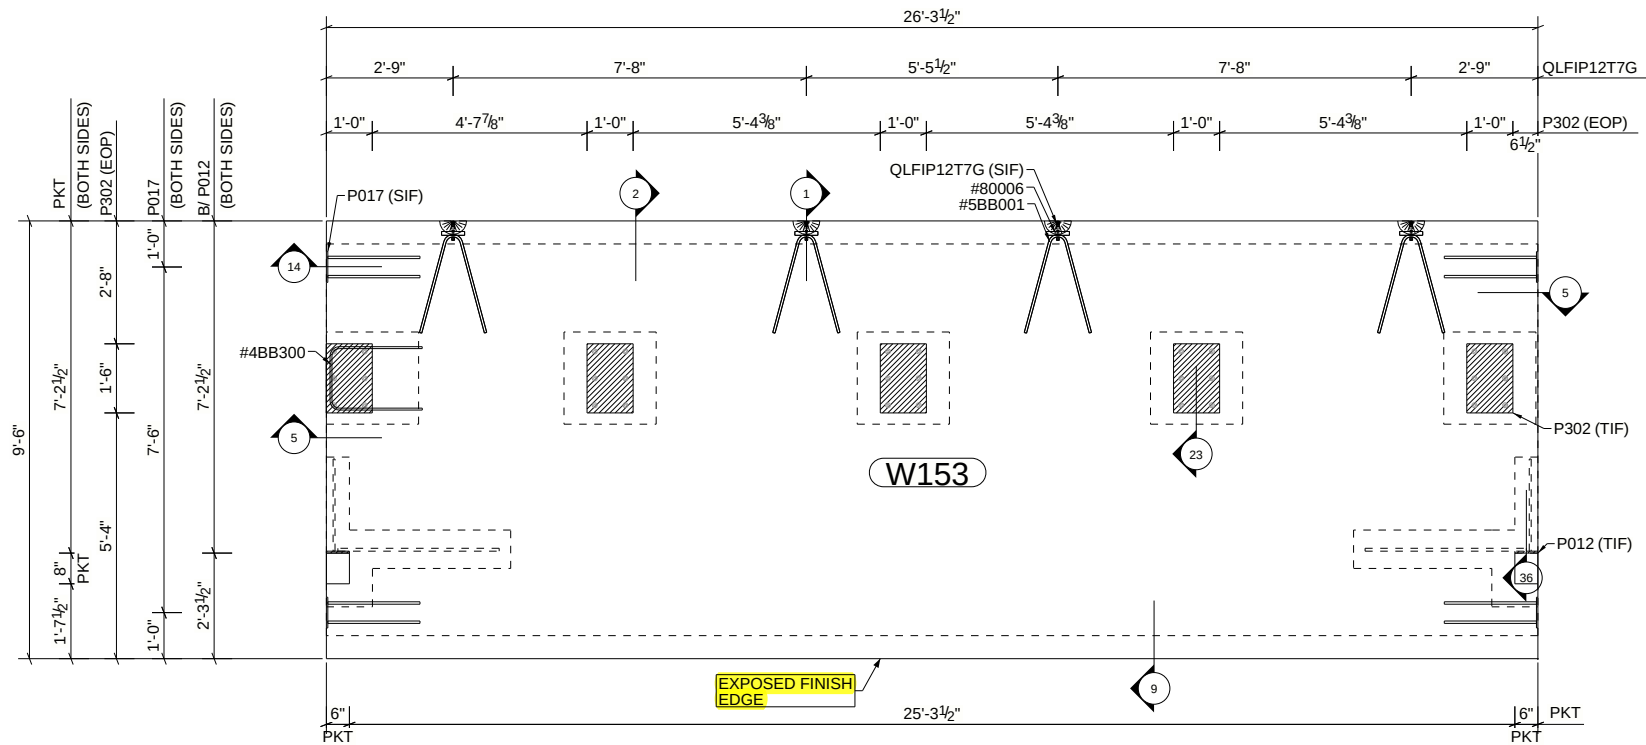

FORM VIEW

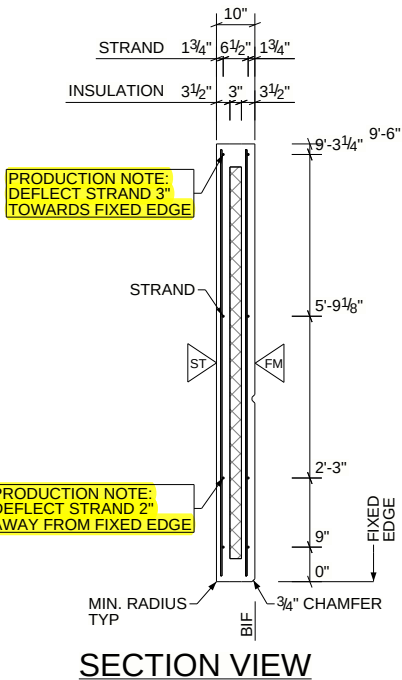

SECTION VIEW

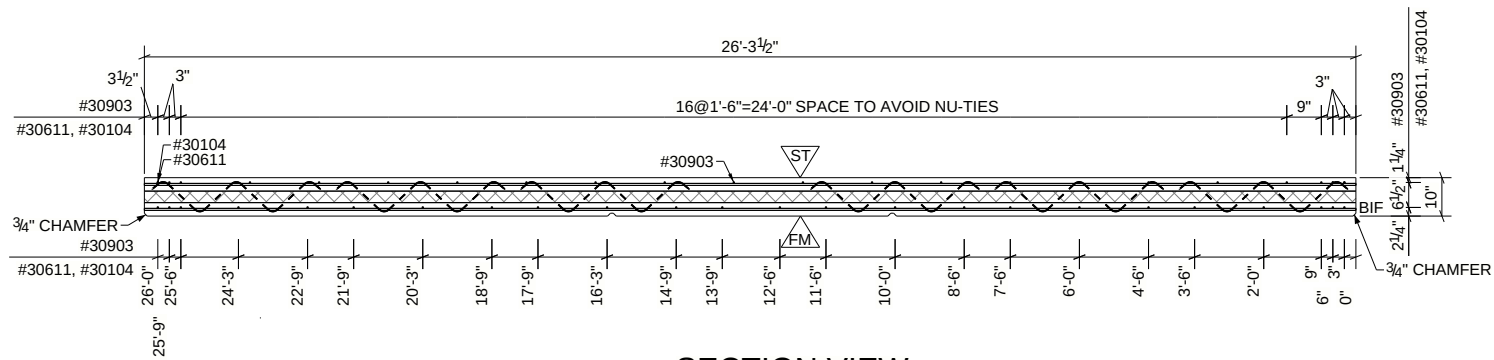

SECTION VIEW

DIAGONAL = 27'-11 9/16"

PRODUCTION NOTE:
BOTTOM WYTHE MUST BE RAKED AT
ALL SOLID ZONE LOCATIONS

- NOTES:
1. ALL REBAR IS TO BE 1 1/2" CLR. UNO
 2. ALL DIMENSIONS ARE TO CENTERLINE UNO
 3. ALL TRIM BARS TO BE 2" CLEAR FROM EDGE OF OPENING UNO

SYMBOLS
SIF = SIDE IN FORM
BIF = BOTTOM IN FORM
TIF = TOP IN FORM
EOP = EDGE OF PLATE

ST = STEEL TROWEL
FM = FORM FINISH
SPX = STRAND PATTERN

NU-TIES	7" NU-TIES	24	EA
P012	PL3/8X6X0'-6" W/ #4 X 2'-0" & #6 X 3'-6"	2	EA
P017	PL3/8X3X0'-8" W/ (2) #5 X 2'-0"	4	EA
P302	PL1/2X1'-0"X1'-6" W/ (6) 5/8" DIA X 4"1/8 LONG HCA	5	EA
QLFIP12T7G	12T SAND PANEL ANCHOR	4	EA
#30104	#3 REBAR X 1'-4" LONG	3	EA
#30611	#3 REBAR X 6'-11" LONG	3	EA
#30903	#3 REBAR X 9'-3" LONG	43	EA
#4BB300	#4 BENT REBAR, SEE TABLE	1	EA
MARK	DESCRIPTION	QTY.	UOM

#5BB001	#5 BENT REBAR, SEE TABLE	8	EA
#80006	#8 REBAR X 0'-6" LONG	8	EA
1/2 STRAND	1/2 DIAMETER STRAND 28.94 Kips	8	EA
MARK	DESCRIPTION	QTY.	UOM

MARK	DESCRIPTION	QTY.	UOM
------	-------------	------	-----

CONCRETE MIX		
MIX	CY	B/F
725N	3.20	B
700A	2.69	F
F _c (28 DAYS)		
6000 PSI		
F _c (SHIPPING)		
4000 PSI		
F _c (RELEASE)		
3500 PSI		


PIECES REQ'D:	1
WEIGHT:	24068 LBS
DESIGN:	SP4
CONTROL NO.:	153

REV.	DESCRIPTION	DATE	BY
0	ISSUED FOR PRODUCTION	07/01/2025	JOM
1			
2			
3			
4			
5			
DRAWN:	CHECKED:	ENGR:	PLOTTED:
JOM	AMC	AJC	08/19/2025

**NORTHEAST
PRECAST**

4081 S. LINCOLN AVE
VINELAND, NJ 08361
OFFICE: 866-699-2557 FAX: 856-765-9087
www.northeastprecast.com

PROJECT:
NEWBURGH SOUTH LOGISTICS CENTER
JOB NO. 25-NE1212
PIECE MARK: W153
SHEET NO. 1 OF 3

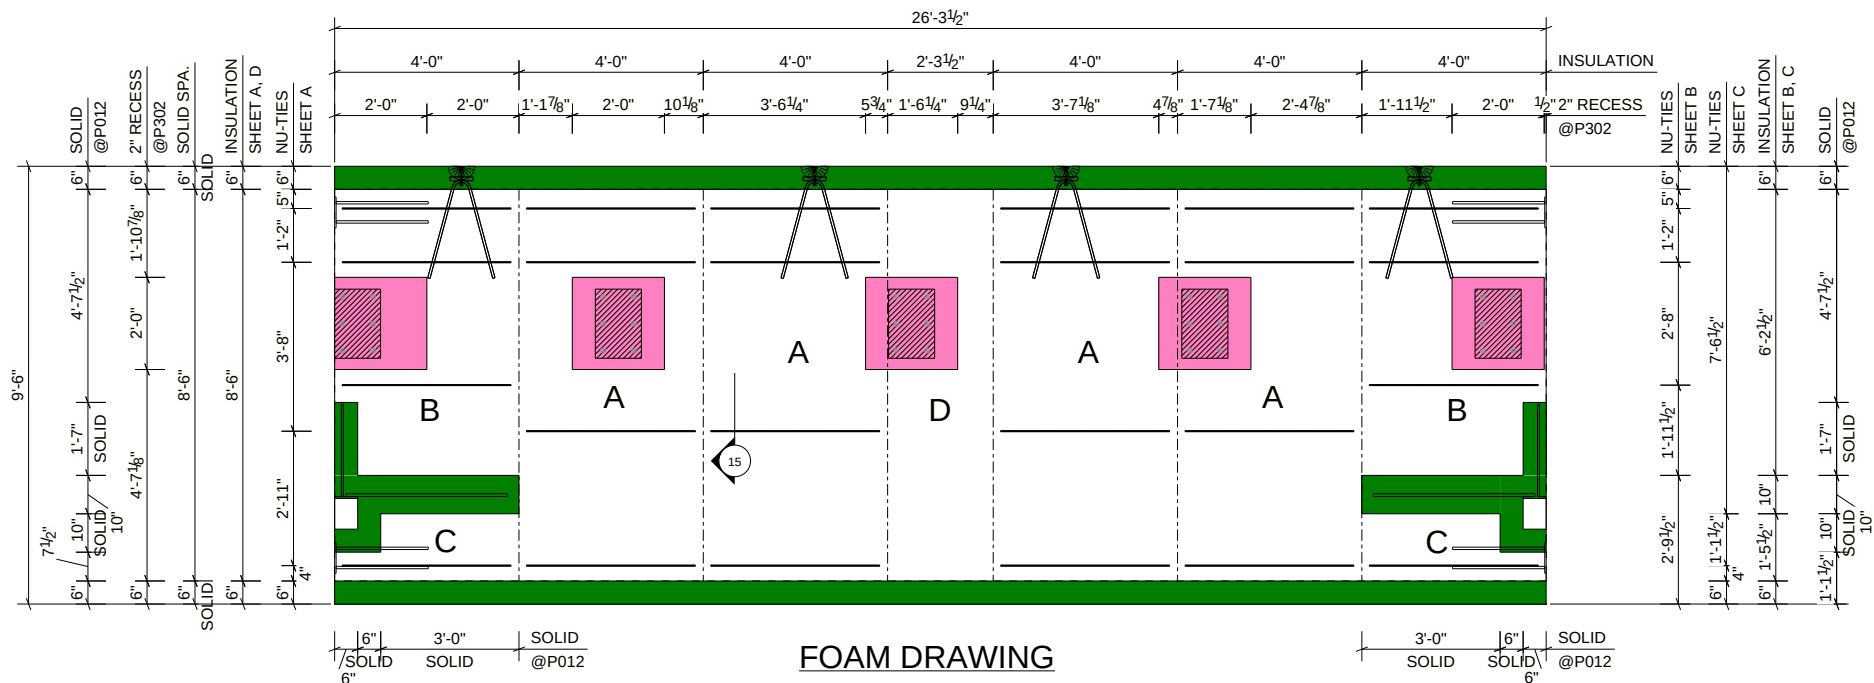

FOAM DRAWING

PIECES OF 3" 1.25# EPS:
A: (4) PIECES @ 4'-0" X 8'-6"
B: (2) PIECES @ 4'-0" X 6'-2 1/2"
C: (2) PIECES @ 4'-0" X 1'-5 1/2"
D: (1) PIECE @ 2'-3 1/2" X 8'-6"

PIECES OF 1" 1.25# EPS:
P302: (5) 2'-0" X 2'-0"

- NOTES:
- 1. ALL REBAR IS TO BE 1 1/2" CLR. UNO
 - 2. ALL DIMENSIONS ARE TO CENTERLINE UNO
- SYMBOLS
SIF = SIDE IN FORM
BIF = BOTTOM IN FORM
TIF = TOP IN FORM

REV.	DESCRIPTION	DATE	BY
0	ISSUED FOR PRODUCTION	07/01/2025	JOM
1			
2			
3			
4			
5			

DRAWN: JOM	CHECKED: AMC	ENGR: AJC	PLOTTED: 08/19/2025
---------------	-----------------	--------------	------------------------

NORTHEAST
PRECAST





4081 S. LINCOLN AVE
VINELAND, NJ 08361
OFFICE: 856-699-2557 FAX: 856-765-9087
www.northeastprecast.com

PROJECT:
NEWBURGH SOUTH LOGISTICS CE***

JOB NO.
25-NE1212

PIECE MARK
W153

SHEET NO.
2 OF 3

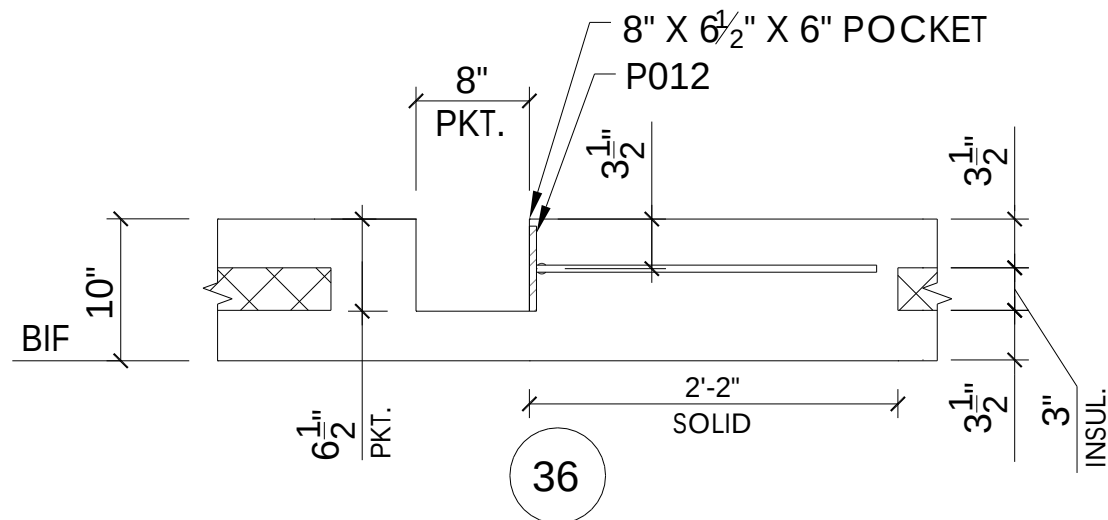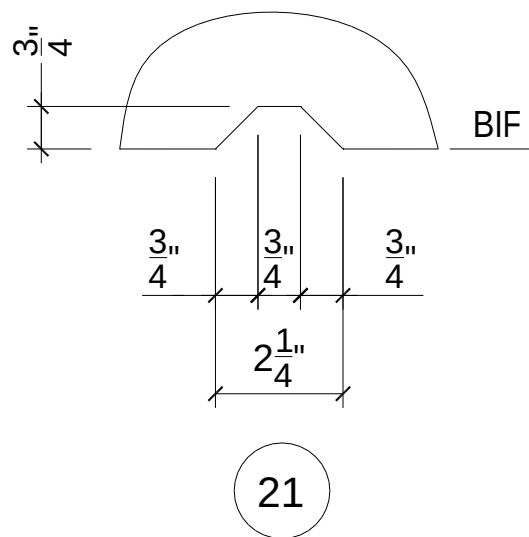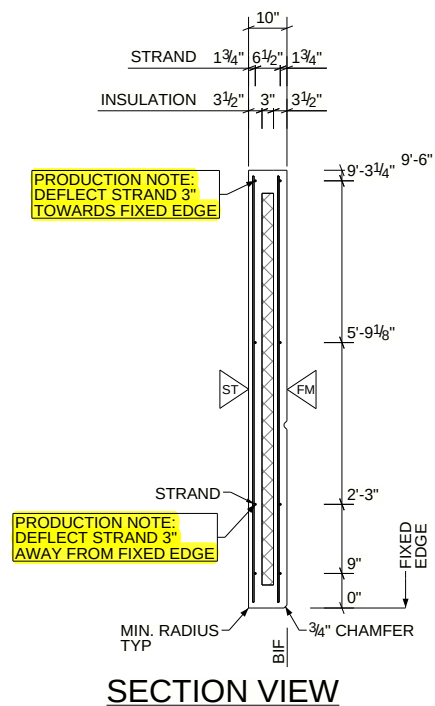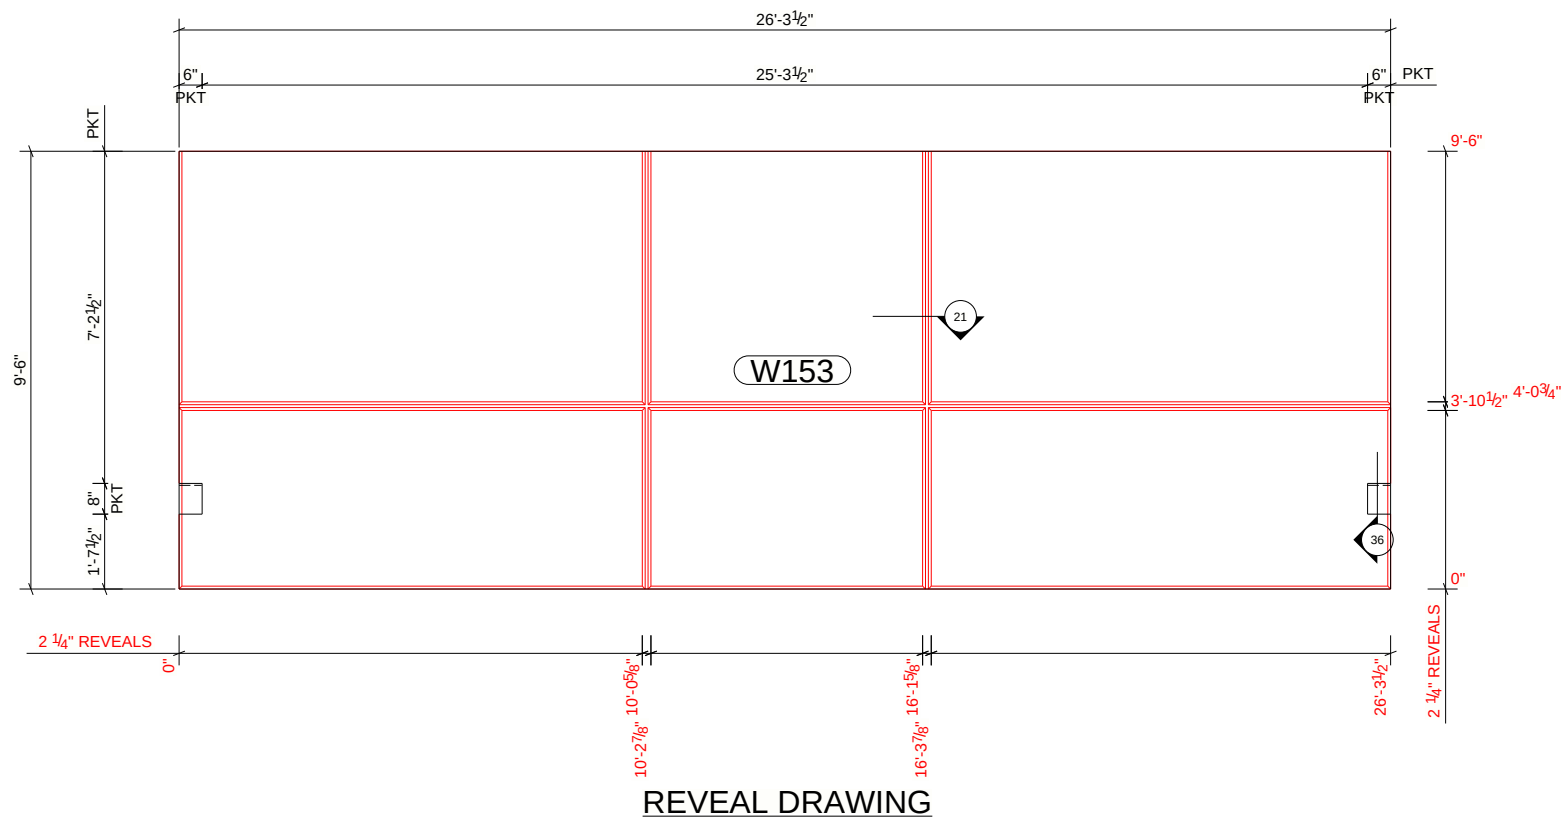

- NOTES:
1. ALL REBAR IS TO BE 1 1/2" CLR. UNO
 2. ALL DIMENSIONS ARE TO CENTERLINE UNO
- SYMBOLS
SIF = SIDE IN FORM
BIF = BOTTOM IN FORM
TIF = TOP IN FORM

REV.	DESCRIPTION	DATE	BY
0	ISSUED FOR PRODUCTION	07/01/2025	JOM
1			
2			
3			
4			
5			

DRAWN: JOM	CHECKED: AMC	ENGR: AJC	PLOTTED: 08/19/2025
---------------	-----------------	--------------	------------------------

PROJECT: NEWBURGH SOUTH LOGISTICS CE***		
JOB NO. 25-NE1212	PIECE MARK W153	SHEET NO. 3 OF 3

NORTHEAST PRECAST	
4081 S. LINCOLN AVE VINELAND, NJ 08361 OFFICE: 866-699-2557 FAX: 856-765-9087 www.northeastprecast.com	