




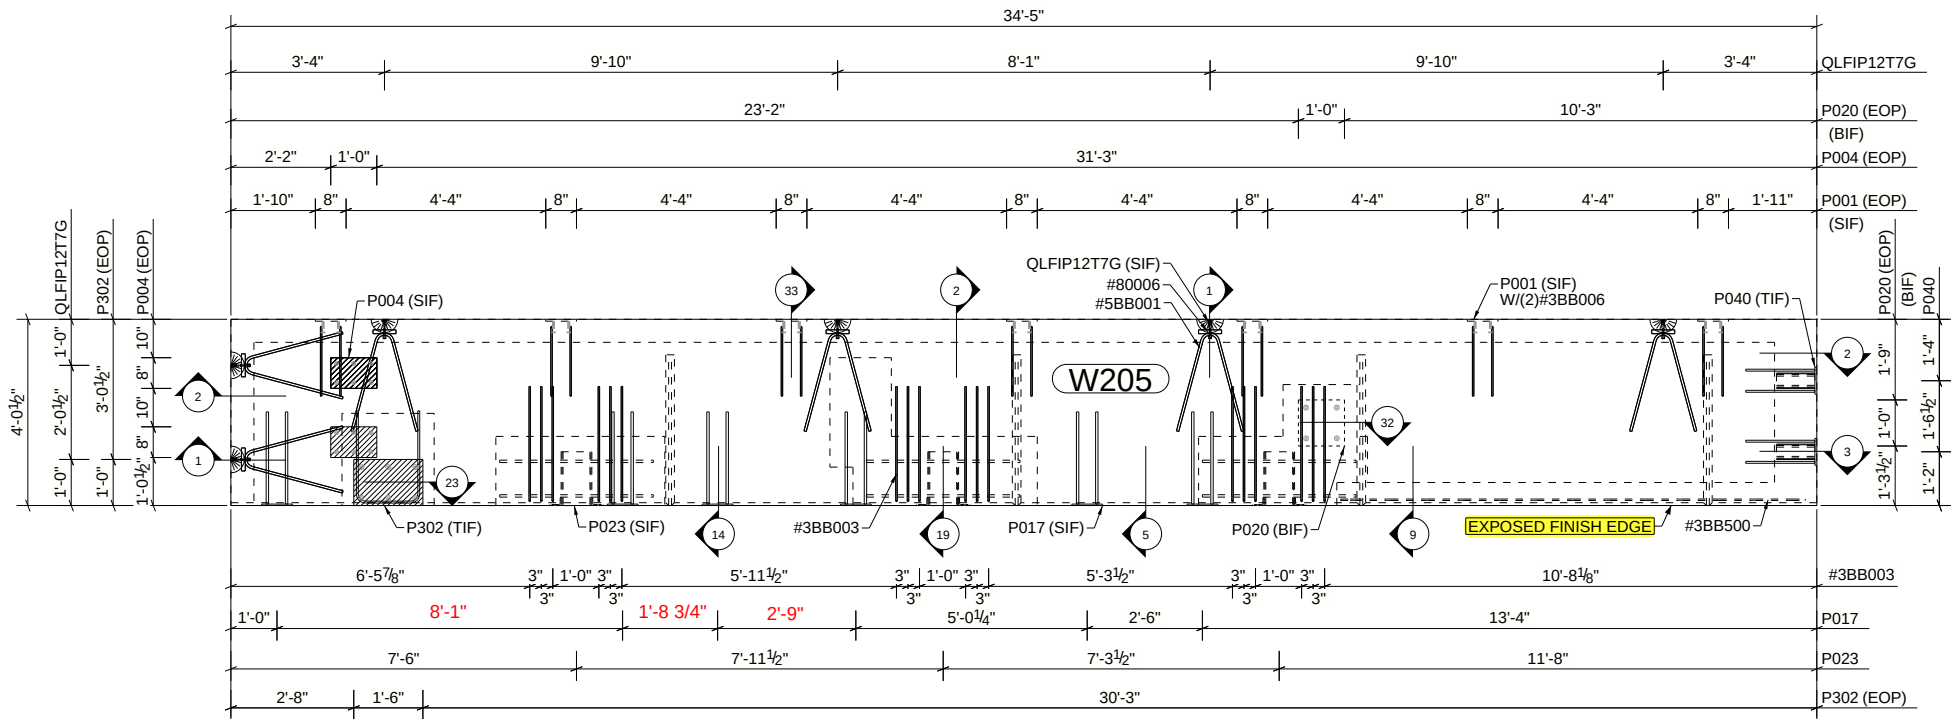

FORM VIEW

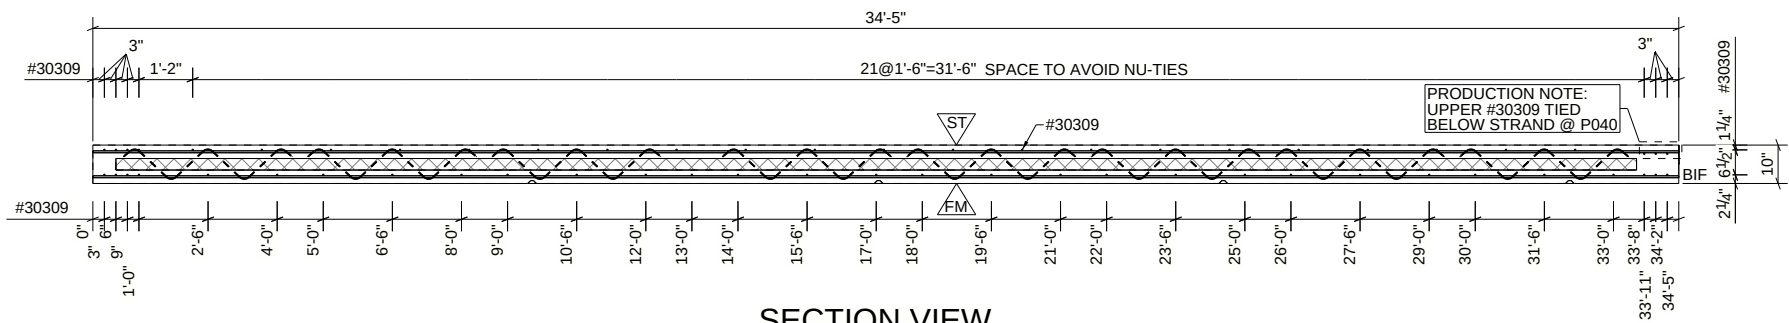

SECTION VIEW

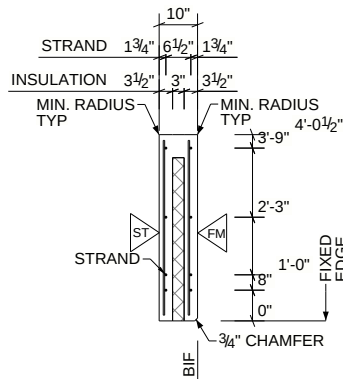

SECTION VIEW

DIAGONAL = 34'-7 7/8"

PRODUCTION NOTE:
BOTTOM WYTHE MUST BE RAKED AT
ALL SOLID ZONE LOCATIONS

- NOTES:
1. ALL REBAR IS TO BE 1 1/2" CLR. UNO
 2. ALL DIMENSIONS ARE TO CENTERLINE UNO
 3. ALL TRIM BARS TO BE 2" CLEAR FROM EDGE OF OPENING UNO

SYMBOLS
SIF = SIDE IN FORM
BIF = BOTTOM IN FORM
TIF = TOP IN FORM
EOP = EDGE OF PLATE

ST = STEEL TROWEL
FM = FORM FINISH
SPX = STRAND PATTERN

NU-TIE	7" NU-TIE	24	EA
P001	PL3/8X8X0'-8" W/ (4) 5/8" DIA X 4 1/8" HCA	7	EA
P004	PL3/8X8X1'-0" W/ (6) 1/2" DIA X 2 5/8" HCA	5	EA
P017	PL3/8X3X0'-8" W/ (2) #5 X 2'-0"	6	EA
P020	PL3/8X12X1'-0" W/ (4) 5/8" DIA X 4 1/8" HCA	1	EA
P023	HSS 8"x4"x1/4"x1'-2" W/ END PL & (4) #4 BARS	3	EA
P040	PL3/4X4X0'-7" W/ (2) #4 X 1'-6"	2	EA
P302	PL1/2X1'-0"x1'-6" W/ (6) 5/8" DIA X 4 1/8" LONG HCA	1	EA
QLFIP12T7G	12T SAND PANEL ANCHOR	6	EA
MARK	DESCRIPTION	QTY.	UOM

#30309	#3 REBAR X 3'-9" LONG	59	EA
#3BB003	#3 BENT REBAR, SEE TABLE	18	EA
#3BB006	#3 BENT REBAR, SEE TABLE	14	EA
#3BB500	#3 BENT REBAR, SEE TABLE	1	EA
#4BB300	#4 BENT REBAR, SEE TABLE	1	EA
#5BB001	#5 BENT REBAR, SEE TABLE	12	EA
#80006	#8 REBAR X 0'-6" LONG	12	EA
1/2 STRAND	1/2 DIAMETER STRAND 28.90 Kips	8	EA
MARK	DESCRIPTION	QTY.	UOM

MARK	DESCRIPTION	QTY.	UOM
------	-------------	------	-----

CONCRETE MIX		
MIX	CY	B/F
725N	1.98	B
700A	1.50	F
F _c (28 DAYS)		
6000	PSI	
F _c (SHIPPING)		
4000	PSI	
F _c (RELEASE)		
3500	PSI	

PIECES REQ'D:
1
WEIGHT:
14416 LBS
DESIGN:
<SP5>
CONTROL NO.:
205

REV.	DESCRIPTION	DATE	BY
0	ISSUED FOR PRODUCTION	07/01/2025	JOM
1			
2			
3			
4			
5			
DRAWN:	CHECKED:	ENGR:	PLOTTED:
JOM	AMC	AJC	08/21/2025

NORTHEAST PRECAST
4081 S. LINCOLN AVE
VINELAND, NJ 08361
OFFICE: 866-699-2557 FAX: 856-765-9087
www.northeastprecast.com

PROJECT:
NEWBURGH SOUTH LOGISTICS CENTER

JOB NO.:
25-NE1212

PIECE MARK:
W205

SHEET NO.:
1 OF 3

REV.	DESCRIPTION	DATE	BY
0	ISSUED FOR PRODUCTION	07/01/2025	JOM
1			
2			
3			
4			
5			

DRAWN: JOM	CHECKED: AMC	ENGR: AJC	PLOTTED: 08/21/2025
---------------	-----------------	--------------	------------------------

