




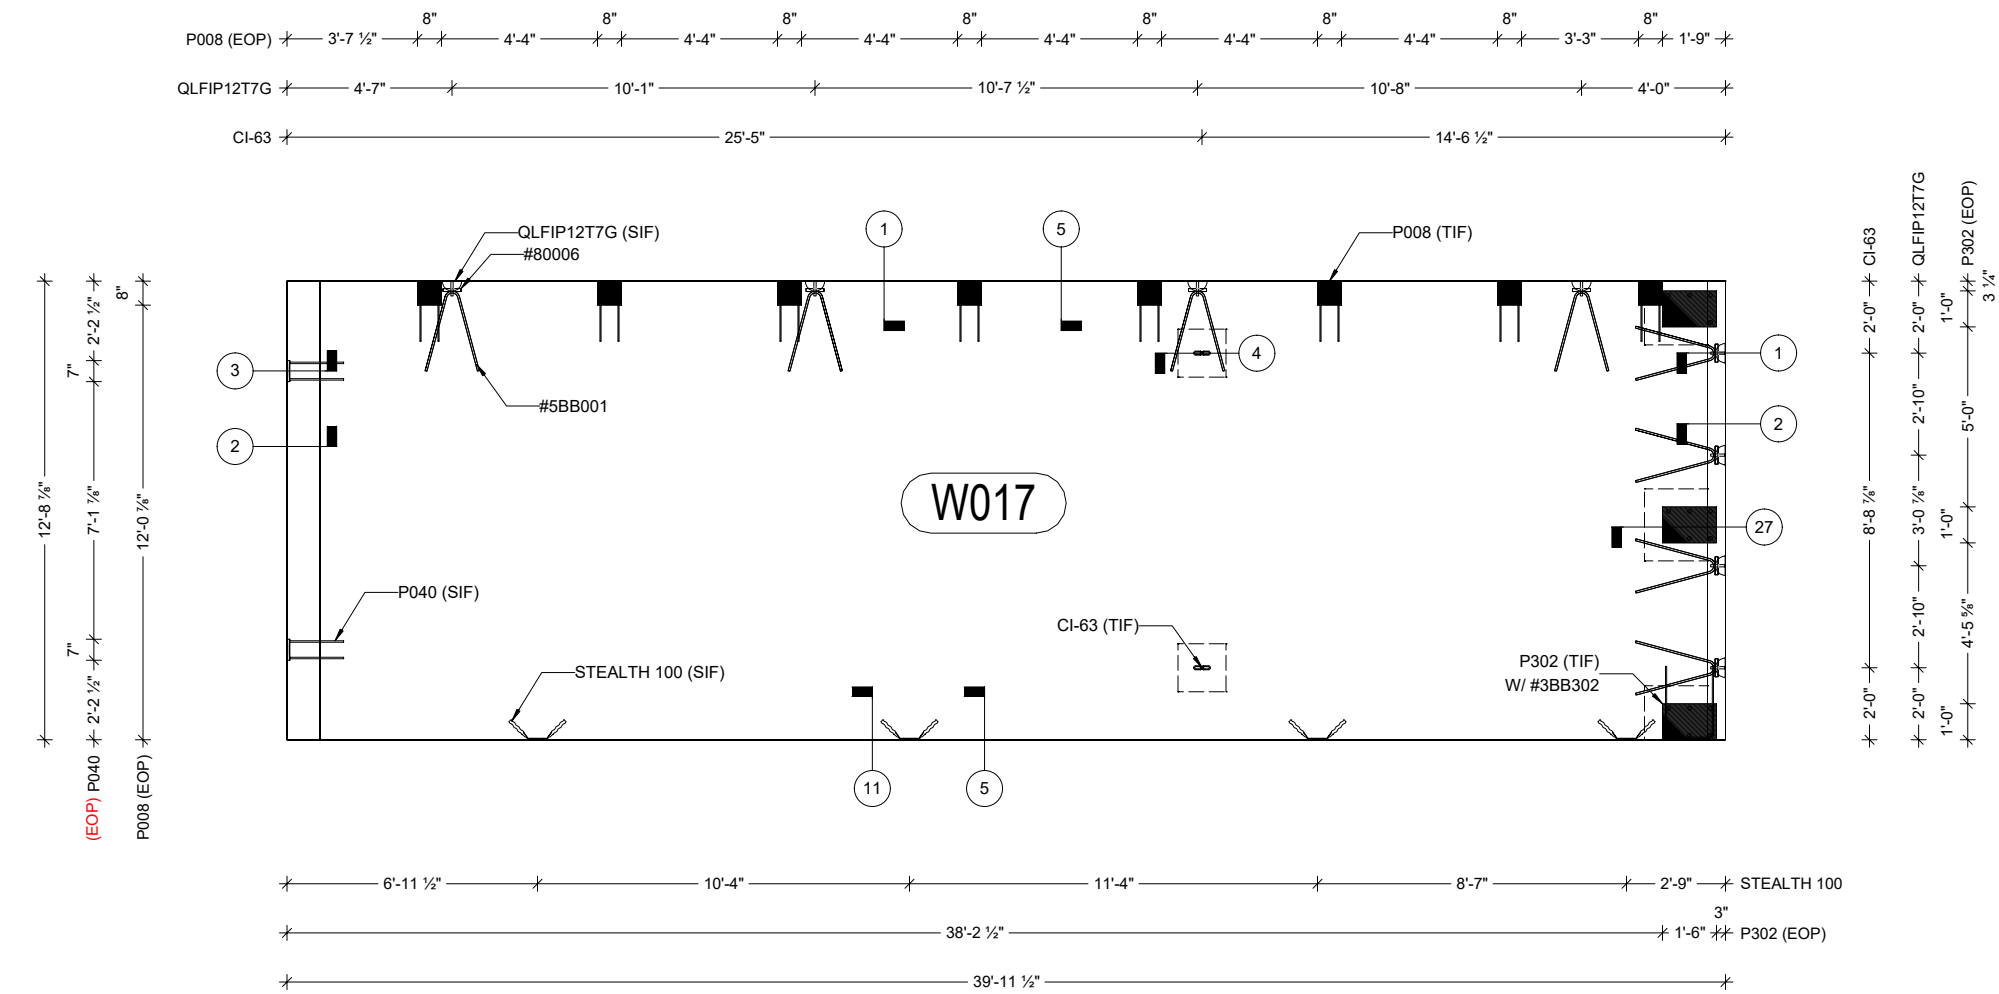

FORM VIEW

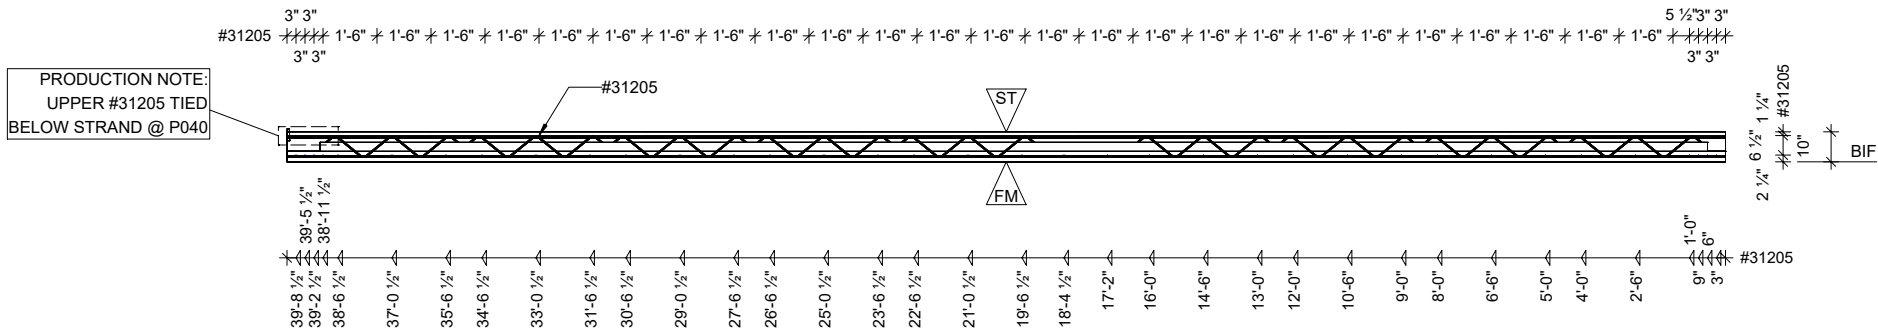

SECTION VIEW

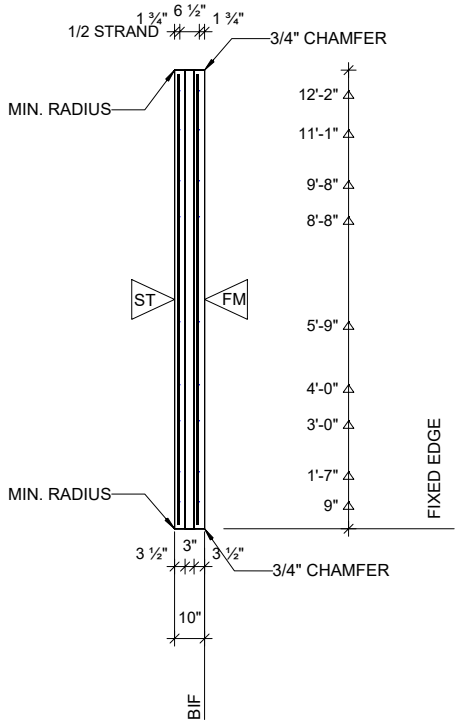

SECTION VIEW

- NOTES:
1. ALL REBAR IS TO BE 1" CLR. UNO
 2. ALL DIMENSIONS ARE TO CENTERLINE UNO
 3. SPLIT STRONGBACK C.Y. 50/50 FACE MIX / BACK MIX
 4. PLACE REBAR 2" FROM EDGE OF ROUGH OPENINGS

- SYMBOLS
- S.I.F. = SIDE IN FORM
B.I.F. = BOTTOM IN FORM
T.I.F. = TOP IN FORM
E.O.P. = EDGE OF PLATE
- ST = STEEL TROWEL
FM = FORM FINISH


#	MARK	DESCRIPTION
2	CI-63	CI6334312P COIL INSERT
36	NU-TIE 7"	7" NU-TIE
8	P008	PL 3/8" x 8" x 8" w/ (4) 1/2" DIA. x 2 5/8" HCA & (2) #3 x 1'-6" Bent Bar
2	P040	PL 3/4" x 4" x 7" w/ (2) #4 x 1'-6" REBAR (2) PL 3/16" TAB
3	P302	PL 1/2" x 12" x 1'-6" w/ (6) 5/8" DIA. 4 1/8" HCA
8	QLFIP12T7G	12T SAND PANEL ANCHOR
4	STEALTH 100	STEALTH 100 PLANGE CONNECTOR
69	#31205	
1	#3BB302	
16	#5BB001	
16	#80006	
18	1/2 STRAND	1/2" DIAMETER STRAND 28.9 KIPS

CONCRETE MIX		PIECES REQ'D: 1
	MIX	CY
B	725N	5.68
F	700A	5.50
f _c (28 DAYS) 6000 PSI		DESIGN: IWP3.00
f _c (SHIPPING) 4500 PSI		
f _d (RELEASE) 3500 PSI		


REL.	DESCRIPTION	DATE	BY
1	ISSUED FOR PROD.	9/4/2025	TP
2			
3			
4			
5			
6			
DRAWN: TP	CHECKED:	ENGR:	PLOTTED: 9/4/2025

NORTHEAST PRECAST			
4081 S. LINCOLN AVE. VINELAND, NJ 08361 OFFICE: 866-699-2557 FAX: 856-765-9087 www.northeastprecast.com			
PROJECT: Flint Hill			
JOB NO.	PIECE MARK	SHEET NO.	
25-NE1222	W017	1 OF 3	

8 1/8" NU-TIE 7" (SHEETS C) 1" 1'-0" 4 7/8" 1'-1 1/8" 3'-5" 3'-10" 3'-10" 3'-9" 2'-3 1/8" 2'-8 3/8" 2'-0 3/8" 4" NU-TIE 7" (SHEETS AB)

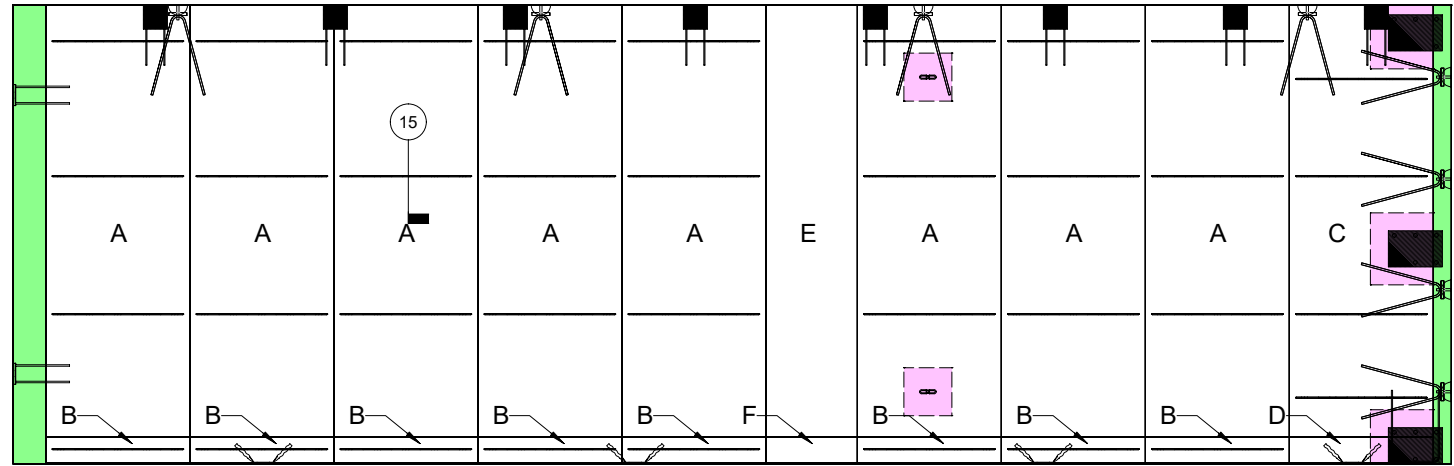

1'-4" 1'-4" 7'-4 7/8" 1'-4" 1'-4" CI-63 RECESSES 1'-6" 3'-5 3/8" 2'-0" 4'-0" 1'-9 1/4" P302 RECESSES 1/4" 12'-0" INSUL 8 5/8" 12'-8 7/8"

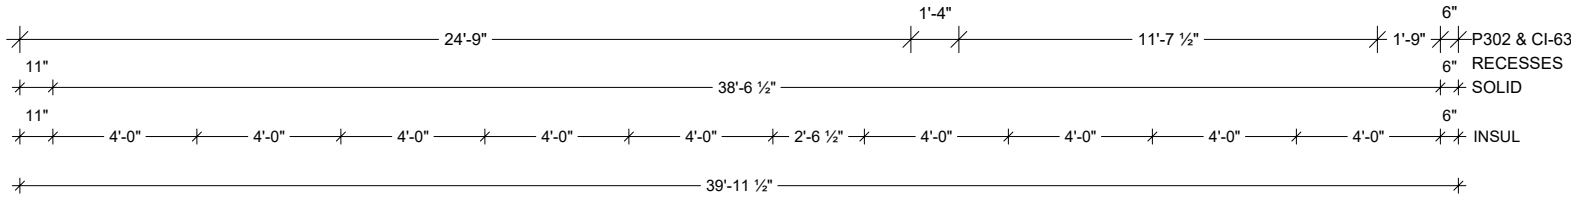

FOAM SHOP DRAWING

PIECES OF 1" EPS (1.25 PCF)

CI-63	(2) PIECES	1'-4" x 1'-4"
P302	(1) PIECES	1'-9" x 1'-6"
P302	(1) PIECES	1'-9 1/4" x 1'-9"
P302	(1) PIECES	2'-0" x 1'-9"

PIECES OF 3" 1.25# EPS:

A, C: (9) PIECES @ 4'-0" X 12'-0"
B, D: (9) PIECES @ 4'-0" X 0'-8 5/8"
E: (1) PIECE @ 2'-6 1/2" X 12'-0"
F: (1) PIECE @ 2'-6 1/2" X 0'-8 5/8"

REL.	DESCRIPTION	DATE	BY
1	ISSUED FOR PROD.	9/4/2025	TP
2			
3			
4			
5			
6			

DRAWN: TP	CHECKED:	ENGR:	PLOTTED: 9/4/2025
--------------	----------	-------	----------------------


NORTHEAST
PRECAST

4081 S. LINCOLN AVE.
VINELAND, NJ 08361
OFFICE: 866-699-2557 FAX: 856-765-9087
www.northeastprecast.com

PROJECT:
25-NE1222

Flint Hill
PIECE MARK
W017

SHEET NO.
2 OF 3

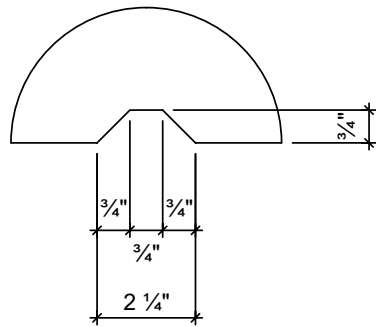

Allplan 2025